

ProJet® 5000


Professional 3D Printer

A Higher Form of
High Definition 3D Printing

CREATE WITH CONFIDENCE.

Featuring the largest build size available, the ProJet® 5000 Professional Printer is designed to deliver maximum productivity in the factory or office. A unique combination of size, precision and ease-of-use make it ideal for large and small durable hard plastic parts with superior feature quality and detail. And this workhorse delivers over 80 hours of unattended operation.

PRECISION • CAPACITY • PRODUCTIVITY

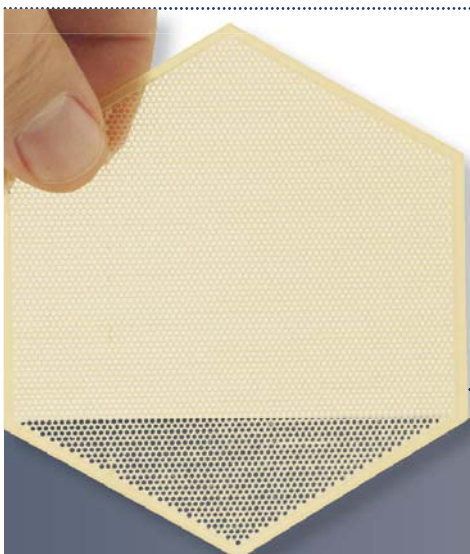

For more information about 3D Systems' ProJet® 5000,
visit www.3dsystems.com



3DSYSTEMS®

www.3dsystems.com



| | |
|--|--|
| Net Build Volume (xyz) | 550 x 393 x 300mm (21.65 x 15.5 x 11.8 inches) |
| Resolution | |
| HS (High Speed) | 375 x 375 x 395 DPI (xyz); 64µ (0.0025 inches) layers |
| HD (High Definition) | 375 x 375 x 790 DPI (xyz); 32 µ (0.0012 inches) layers |
| UHD (Ultra High Definition) | 750 x 750 x 890 DPI (xyz); 29 µ (0.0011 inches) layers |
| Accuracy (typical) | 0.025-0.05 mm (0.001-0.002 inch) per inch of part dimension accuracy may vary depending on build parameters, part geometry and size, part orientation, and post-processing methods |
| VisiJet® MX Build Material | |
| Description | High durability and strength UV curable plastic, natural colour |
| Density @ 80 °C (liquid) | 1.02 g/cm ³ (ASTM D4164) |
| Tensile Strength | 31 MPa (ASTM D638) |
| Tensile Modulus | 1267 MPa (ASTM D638) |
| Elongation at Break | 20% (ASTM D638) |
| Flexural Strength | 39 MPa (ASTM D638) |
| Heat Distortion Temperature | 39 °C @ 0.45 MPa (ASTM D648) |
| VisiJet® S300 Support Material | |
| Description | Non-toxic melt-away wax support material, white |
| Melting Point | 60 °C |
| Softening Point | 40 °C |
| Material Packaging | Build and support materials in clean 2.0 kg cartridges, System can hold up to eight cartridges with additional material bays (optional) |
| Electrical | 115-240 VAC, 50/60 Hz, single-phase, 1200 W |
| Dimensions (WxDxH) | |
| 3D Printer Crated | 1828 x 1155 x 1981mm (72 x 45.5 x 78 inches) |
| 3D Printer Uncrated | 1531 x 908 x 1450mm (60.3 x 35.7 x 57.1 inches) |
| Weight | |
| 3D Printer Crated | 708 kg (1555 lbs)* |
| 3D Printer Uncrated | 538 kg (1180 lbs)* |
| * Weight based on standard configuration with 4 MDMs (material delivery modules). Add 28 kg (60lb) for each additional pair of MDMs. | |
| ProJet® Accelerator Software | |
| Easy build job set-up, submission and job queue management; Automatic part placement and build optimisation tools Part stacking and nesting capability; Extensive part file editing tools; Automatic support generation; Job statistics reporting tools | |
| Network Compatibility | Network ready with 10/100 Ethernet interface |
| Client Hardware Recommendation | 1.8 GHz with 1GB RAM (OpenGL support 64 mb video RAM) or higher |
| Client Operating System | Windows XP Professional, Windows Vista, Windows 7 |
| Input Data File Formats Supported | STL and SLC |
| Operating Temperature Range | 18-28 °C (64-82 °F) |
| Noise | < 65 dBA estimated (at medium fan setting) |
| Certifications | CE marked |

www.3dsystems.com



3D Systems Europe Ltd.
Mark House, Mark Road
Hemel Hempstead
Herts HP2 7UA - UK
Tel: (+44) 1442 282 600
Email: info@3dsystems-europe.com

3D Systems GmbH
Postfach 12 02 07
D-64239 Darmstadt
Germany
Tel: (+49) 6151 357 0
Email: info@3dsystems-europe.com

Warranty/Disclaimer: The performance characteristics of these products may vary according to product application, operating conditions, material combined with, or with end use. 3D Systems makes no warranties of any type, express or implied, including, but not limited to, the warranties of merchantability or fitness for a particular use.

© 2013 by 3D Systems, Inc. All rights reserved. Specifications subject to change without notice. The 3D logo, stylised text, ProJet and VisiJet are registered trademarks of 3D Systems, Inc.
PN 70749 Issue Date February 2013